

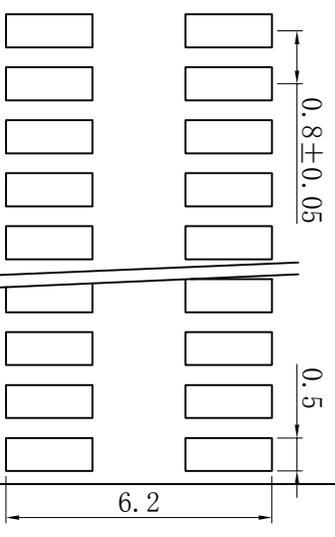
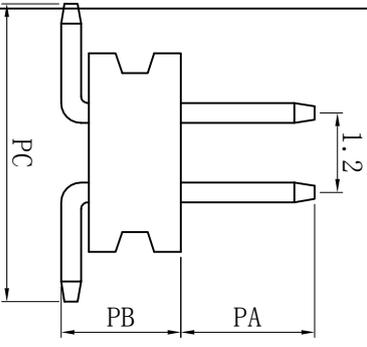


版本 REV	编号 ECN NO.	位置 LOCATIONS	变更内容 DESCR IPTION	日期 DATE	变更人 DESIGN
A0					

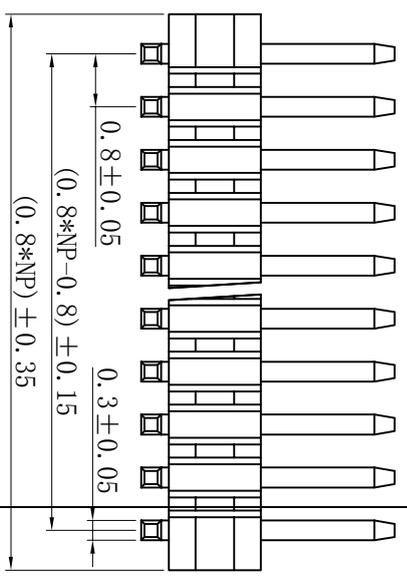

- Specifications
1. Current Ratings: 1amps
  2. Insulation Resistance: 1000 MΩ min.
  3. Dielectric withstanding Voltage: AC 500V
  4. Contact Resistance: 30 mΩ max.
  5. Operating Temperature: -25°C to +85°C
  6. Contact Material: Brass
  7. Insulation Material: Asfollows
  8. Plated: Asfollows

### Ordering Information

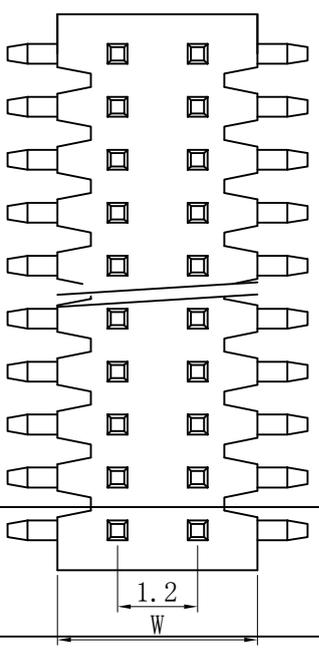

东莞市铷高电子有限公司

TOLERANCE UNLESS OTHERWISE SPECIFIED		品名 TITLE:		PDU-841 SMT 双排排针		日期 (Date):		09.08.19	
LITER ANGLES		料号 (P/N):		审核 (CHKD):		日期 (Date):			
.0 ±0.3		.0°		.0°		.0°		.0°	
.00 ±0.2		.0°		.0°		.0°		.0°	
.000 ±0.1		.00°		.00°		.00°		.00°	
比例 (SCALE):		单位 (UNITED):		mm		图例 (DIN):		日期 (Date):	
1:1		mm		审核 (CHKD):		日期 (Date):			
		图例 (APPD):		日期 (Date):		图例 (DIN):		日期 (Date):	
		张数 (SHEET):		XOFX		图例 (DIN):		日期 (Date):	
		SIZE:		A4		图例 (DIN):		日期 (Date):	
		TYPE:				图例 (DIN):		日期 (Date):	