


(2.54*NP)±0.30

(2.54*NP-2.54)±0.15

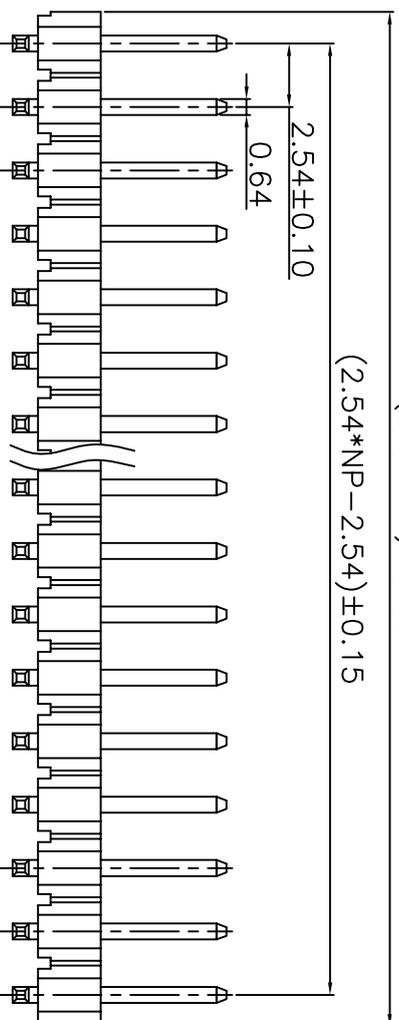


版本号	变更说明	日期	签名
A	NEW	12.07.09	Zeng_gc

Specifications

- 1. Current Rating: 2Amps
- 2. Insulation Resistance: 5000 MΩ min.
- 3. Dielectric withstanding Voltage: AC 500V
- 4. Contact Resistance: 30 mΩ max.
- 5. Operating Temperature: -40°C to +105°C
- 6. Contact Material: Copper Clad Steel
- 7. Insulation Material: As follows
- 8. Plated: As follows

Ordering Information

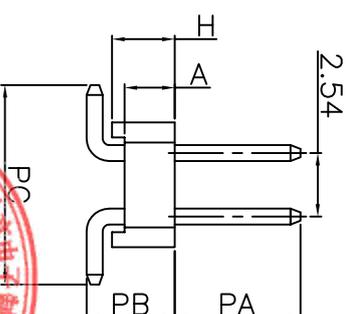

东莞市铷高电子制品有限公司

公差尺寸	公差标准	角度	度
±0.25	0.°	±3°	
±0.20	0.°	±2°	
±0.10	0.00°	±1°	

品名	排针PH2.54 双排 2NP SMT 系列	制图	12.07.09
料号		审核	
文件编号		核准	
比例	1:1	单位	mm
		页码	2/4
		尺碼	A4

PCB LAYOUT

