
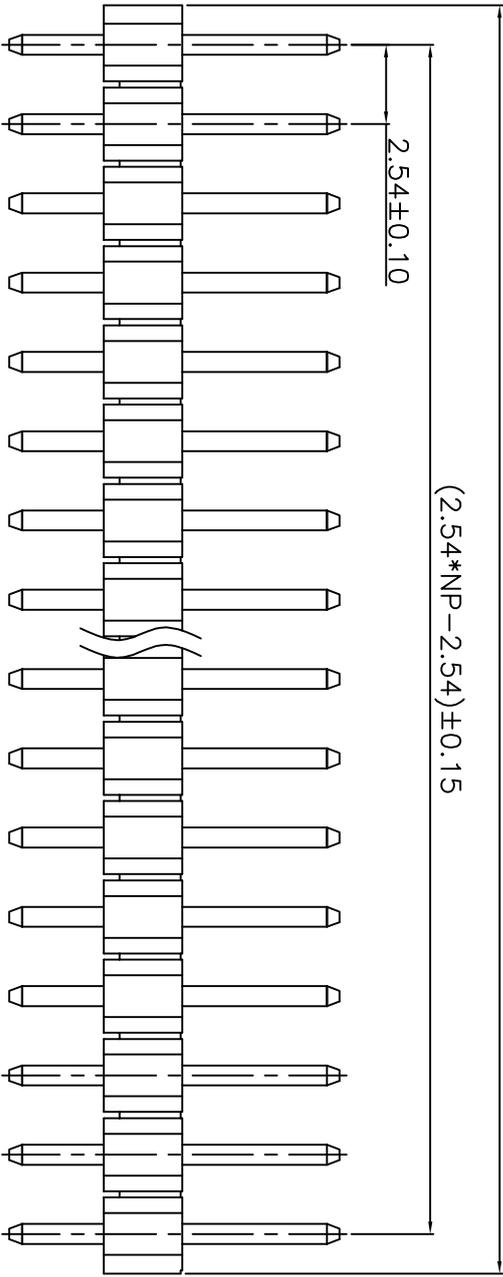


版本	变更	说明	日期	签名
A	NEW		12.07.09	Zeng_qc


Specifications

- 1. Current Ratings: 2Amps
- 2. Insulation Resistance: 5000 MΩ min.
- 3. Dielectric withstanding Voltage: AC 500V
- 4. Contact Resistance: 30 mΩ max.
- 5. Operating Temperature: -40°C to +105°C
- 6. Contact Material: Copper Clad Steel
- 7. Insulation Material: As follows
- 8. Plated: As follows

Ordering Information



PCB LAYOUT

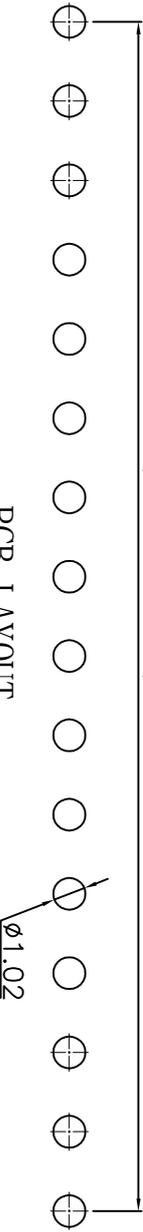

公差尺寸	公差标准	角度	度
0	±0.25	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

东莞市铀高电子制品有限公司				
品名	排针PH2.54 单排 1XNP 180度 系列	制	图	12.07.09
料号		审	核	
文件编号		核	准	
比例	1:1	单位	mm	页码
				1/2
				尺码
				A4

