
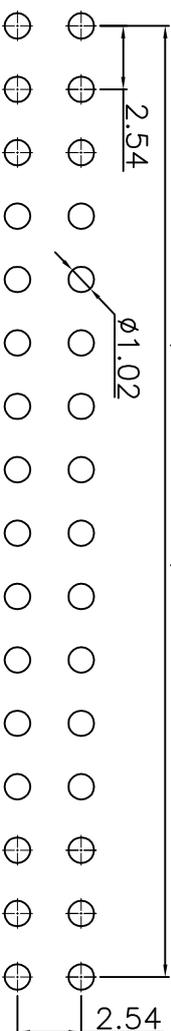


(2.54*NP)±0.30

(2.54*NP-2.54)±0.15

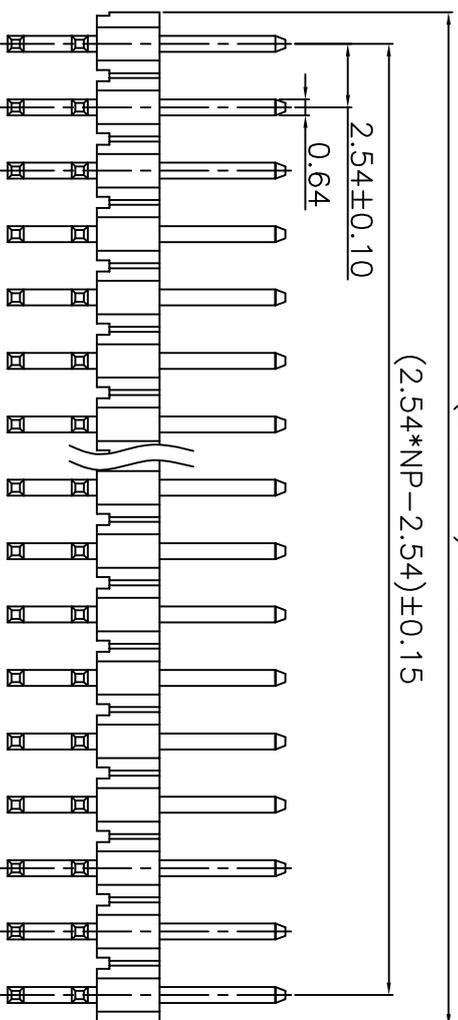


PCB LAYOUT

版本	变更	说明	日期	签名
A	编号	NEW	12.07.09	Zeng_qc

Specifications

1. Current Rating: 2Amps
2. Insulation Resistance: 5000 MΩ min.
3. Dielectric withstanding Voltage: AC 500V
4. Contact Resistance: 30 mΩ max.
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Copper Clad Steel
7. Insulation Material: As follows
8. Plated: As follows

Ordering Information

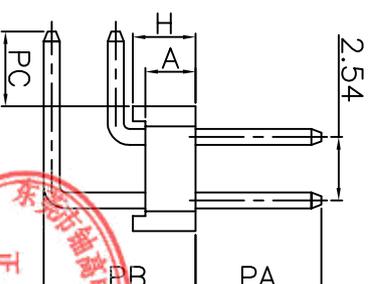

东莞市铷高电子制品有限公司

公差	尺寸	角度	度	±3°
线性	±0.25	0.°	±2°	
公差	±0.20	0.°	±2°	
公差	±0.10	.00°	±1°	

品名	排针PH2.54 双排 2XNP 90度 系列	制图	12.07.09
料号		审核	
文件编号		核准	
比例	1:1	单位	mm
		页码	2/3
		尺码	A4