


ROHS

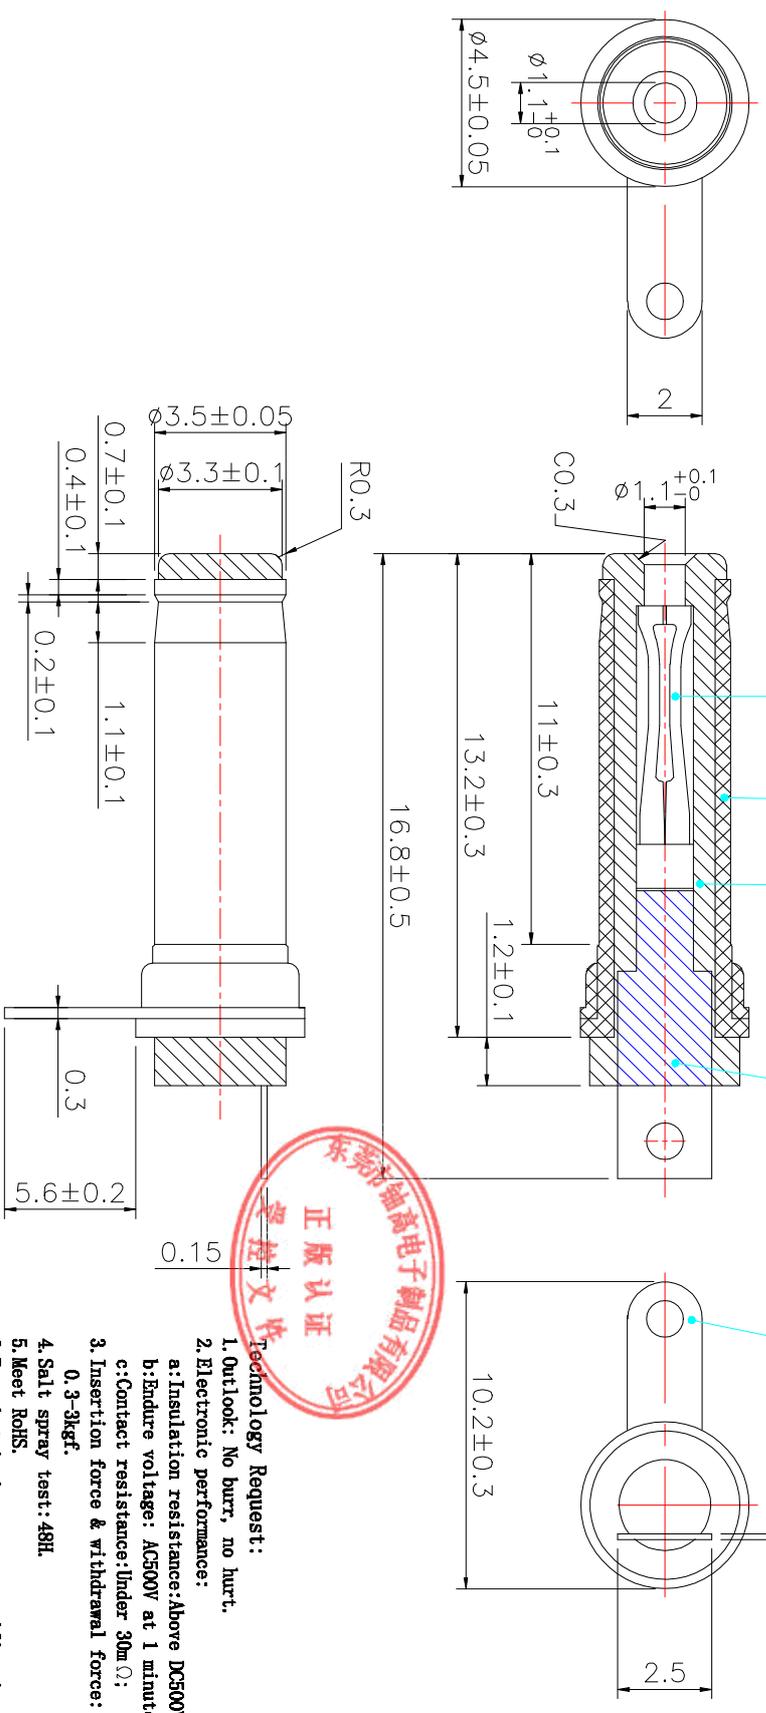

Technology Request:

1. Outlook: No burr, no hurt.
2. Electronic performance:
  - a: Insulation resistance: Above DC500V/100M $\Omega$ ;
  - b: Endure voltage: AC500V at 1 minute;
  - c: Contact resistance: Under 30m $\Omega$ ;
3. Insertion force & withdrawal force: 0.3-3kgf.
4. Salt spray test: 48H.
5. Meet RoHS.
6. Remark \* is important specification.

版本 REV	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0	新版制定		June	20180917

东莞市钰高电子有限公司

单位 Unit	一般公差 The General tolerance	7	8	9
mm				
比例 Scale	XX:±0.3	6		
视图 Third angle projection	X:X:±0.1	5		
	.XX:±0.05	4		
		3		
		2		
		1		

内端子 Inner Terminal	外管 Outer Tube	极片 Terminal Sheet	塑料 Plastic	零件 Part
BRASS(H65)	BRASS(H65)	BRASS(H65)	POM	PART
Sn 40~120 $\mu$	Sn 40~120 $\mu$	Sn 40~120 $\mu$	PA66	
BRASS(C5191)	BRASS(H65)	Sn 40~120 $\mu$	BLACK	
			BLACK	
			PLATING	

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	规格 DESCRIPTION:	品名 P/N:	图号 DRAWN NO:
June	杨义邦	李莹峰	DC PLUG $\phi 3.5 * \phi 1.1 * 16.8$	3511TVL168-90	CP-01-0034