
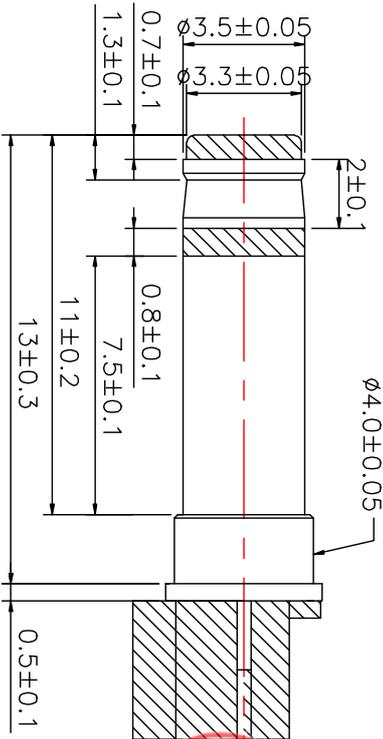


ROHS

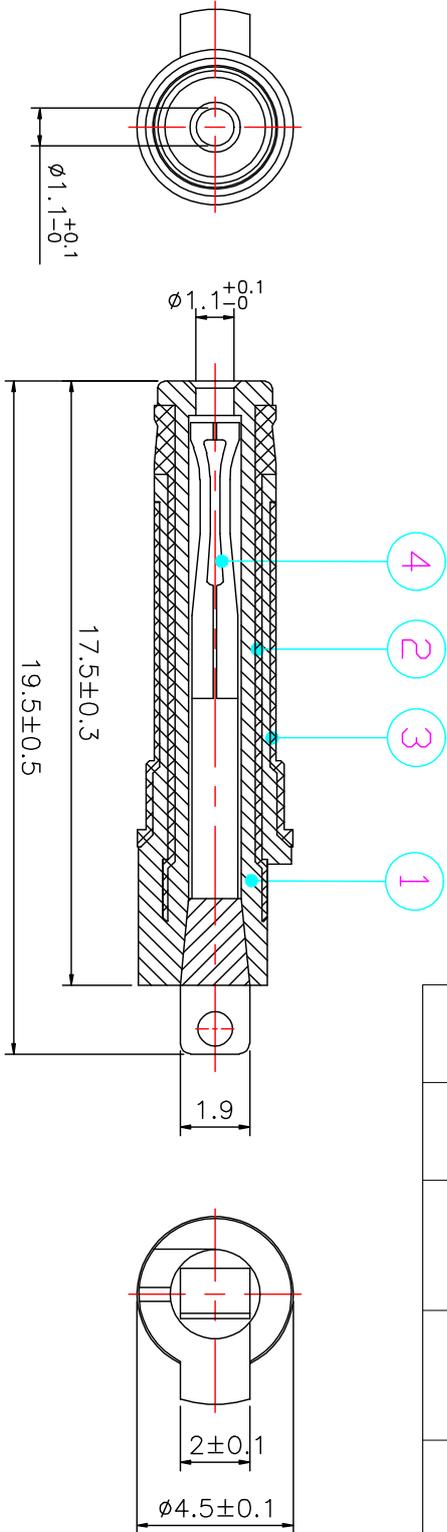

Technology Request:
 1.Outlook:No burr, no hurt.
 2.Electronic performance:
 a:Insulation resistance: Above DC500V/100MΩ;
 b:Endure voltage:AC500V at 1 minute;
 c:Contact resistance:Under 30mΩ;
 3.Insertion force & withdrawal force:0.3-3kgf.
 4.Salt spray test:24H.
 5.Meet RoHS.
 6.Remark * is important specification.

版本 REV	修正标记 REVLIR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

单位 Unit	一般公差 The General Tolerance	7	8	9
mm	XX:±0.3			
比例 Scale	XX:±0.1			
视图 Third angle projection	X:X:±0.1			
	.XX:±0.05			
		NO.		
		1	PLASTIC	BLACK
		2	PLASTIC	BLACK
		3	PLASTIC	BLACK
		4	PLASTIC	BLACK
		5	PLASTIC	BLACK
		6	PLASTIC	BLACK
		7	PLASTIC	BLACK
		8	PLASTIC	BLACK
		9	PLASTIC	BLACK

东莞市铷高电子有限公司

规格 DESCRIPTION: DC PLUG 3POLE 0.3.5*0.1.1*19.5

品名 P/N: 3511TV3P195

图号 DRAWN NO: CP-01-0039

核准 APPROVED BY

杨义邦

June

制图 DRAWN BY

李莹峰

June

核准 APPROVED BY

杨义邦

June

核准 APPROVED BY

杨义邦

June