
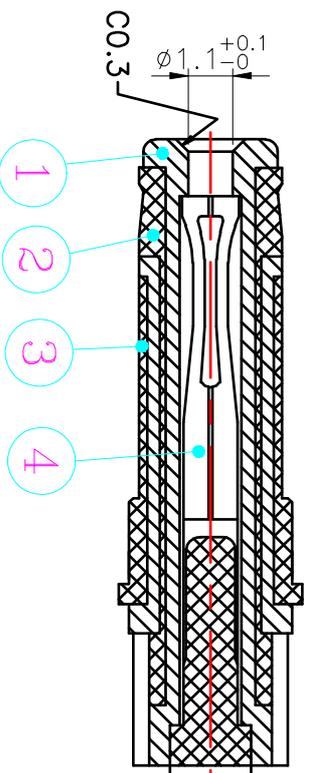


ROHS

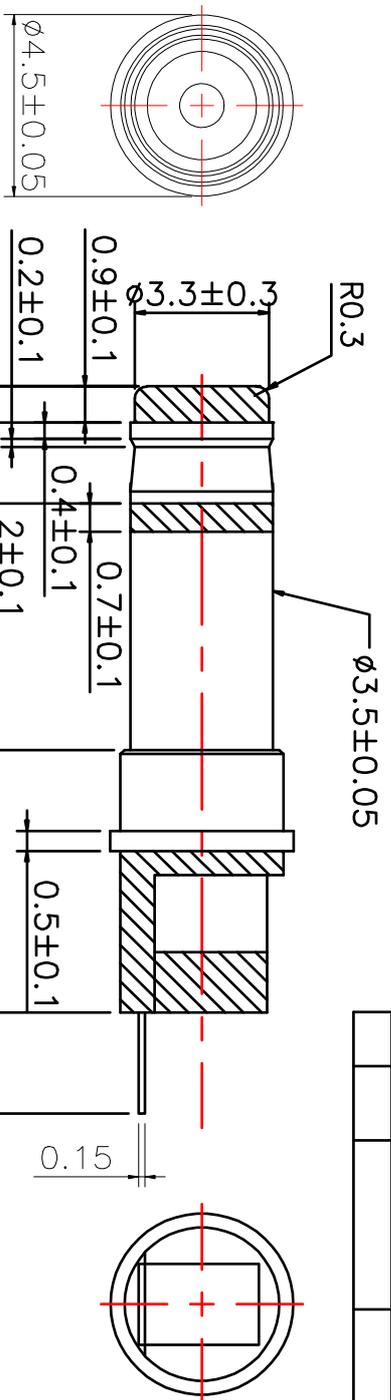

- 1.Outlook: No burr, no hurt.
 2.Electronic performance: Above DC250V/100MA;
 b:Endure voltage: AC 250V 0.5mA at 1 minute;
 c>Contact resistance: Under 30mΩ;
 3.Insertion force & withdrawal force: 0.3-3kgf.
 4.Soft spray test:24H.
 5.Meet ROHS.
 6.Remark * is important specification.

REV	REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新板制定		June	20180917

东莞市铷高电子有限公司

批准	校对	制图	规格	DESCRIPTION:
June	杨义邦	李莹峰	品名	DC PLUG 3POLE 3.5*1.1*18
			图号	3511TV3P180
			图号	CP-01-0037

单位	mm	一般公差
比例	5:1	XX:±0.3
通孔		X.X:±0.1
Third angle projection		.XX:±0.05

NO.	PART	MATERIAL	PLATING	批准	校对	制图
1	正极端子片	BRONZE(C5191)	NI 40-120μ	June	杨义邦	李莹峰
2	负极外管	BRASS(C3604)	NI 40-120μ			
3	绝缘中管	PAGE	BLACK			
4	PLASTIC					
5						

7
6
5
4
3
2
1

7
6
5
4
3
2
1