

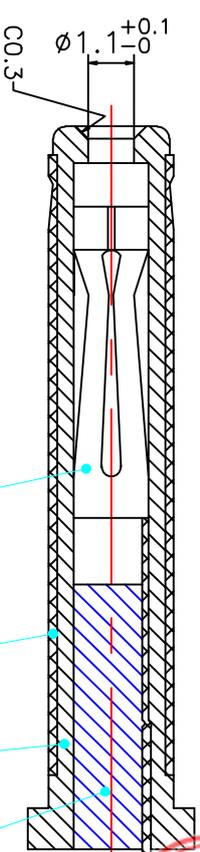


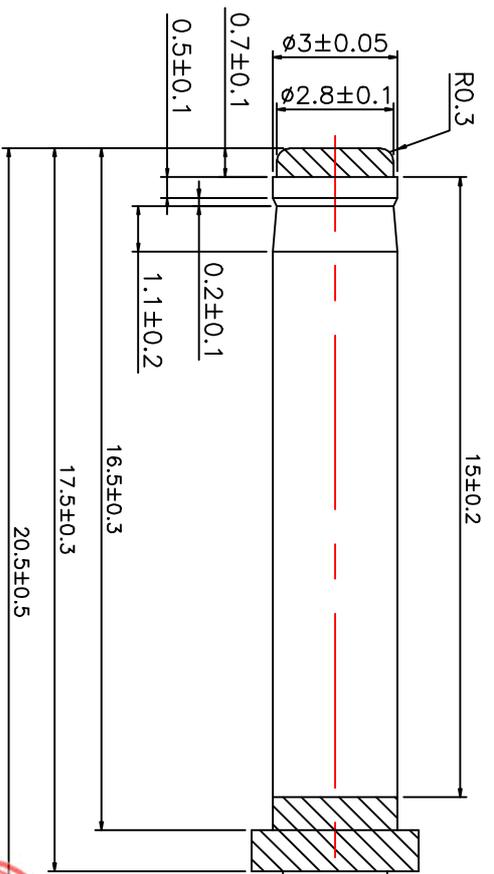


ROHS

版本 REV	修正标记 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917



Technology Request:
 1.Outside: No burr, no hurt.
 2.Electronic performance:
 a:Insulation resistance:
 Above DC500V/100MΩ;
 b:Endure voltage:
 AC500V at 1 minute;
 c:Contact resistance:
 Under 30mΩ;
 3.Insertion force & withdrawal force:
 0.3~3kgf.
 4.Salt spray test:24H.
 5.Meet RoHS.
 6:Remark * is important specification.



东莞市铷高电子有限公司

规格 DESCRIPTION: DC PLUG $\phi 3.0 \times \phi 1.1 \times 20.5$

品名 P/N: 3011TV205

图号 DRAWN NO: CP-01-0027

核准 APPROVED BY: June
 校对 CHECKED BY: 杨义邦
 制图 DRAWN BY: 李莹峰

NO.	MATERIAL	PLATING
1	PA66	BLACK
2	PLASTIC	BLACK
3	3.0*15 导电管	BRASS(H65)
4	3011-20.5 导电端子	Sn 40~120μ
5		Ni 40~120μ
6		BRONZE(C5191)
7		

单位 Unit	公差 Tolerance
mm	xx.:±0.3
比例 Scale	xx.:±0.1
视图 Third angle projection	.xx.:±0.05

1 2 3 4 5 6 7 8 9