

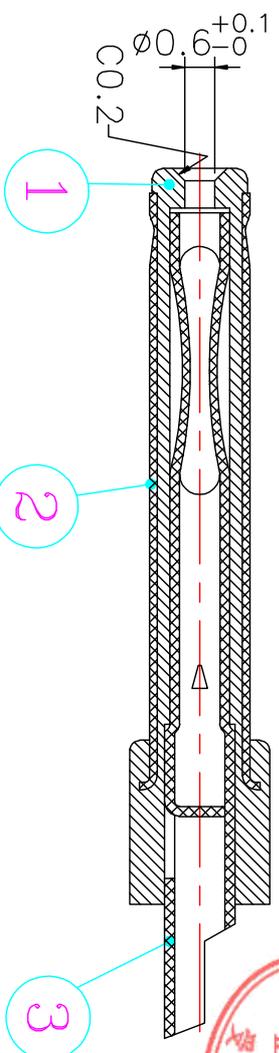
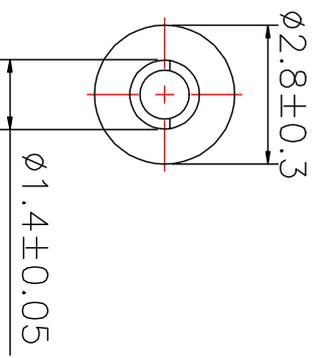
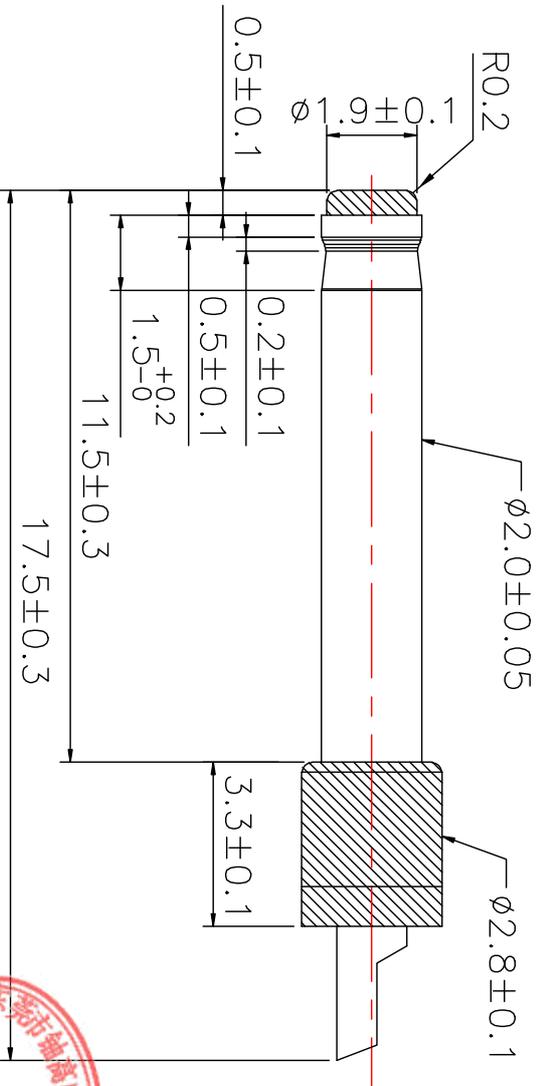


ROHS

版本 REV	修正标记 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

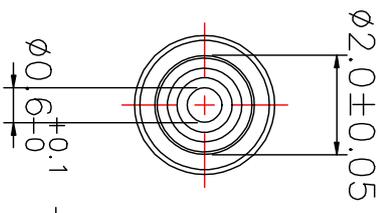

Technology Request:
 1.Outlook: No burr, no hurt.
 2.Electronic performance:
 a:Insulation resistance:
 Above DC500V/100MΩ;
 b:Endure voltage:
 AC500V at 1 minute;
 c>Contact resistance:
 Under 30mΩ;
 3.Insertion force & withdrawal force:
 0.3-3kgf.
 4.Salt spray test:24h.
 5.Meet RoHS.
 6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7	8	9
比例 Scale	5:1	xx:±0.3	6		
视图 Third angle projection		x:x:±0.1	5		
		.xx:±0.05	4		
			3		
			2		
			1		
			NO.		

材料 Material	批准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	东莞市铷高电子有限公司		
内零件 BRONZE(C5191)	June	杨义邦	李莹峰	规格 DESCRIPTION:	DC PLUG 2.0*0.6*17.5	
外零件 BRASS(C2680)				品名 P/N:	2006TV175	
PLASTIC				图号 DRAWN NO:	CP-01-0012	
PLASTIC						
PA66						
BLACK						
PLATING						