


ROHS

版本 REV	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0	新版制定		June	20180917

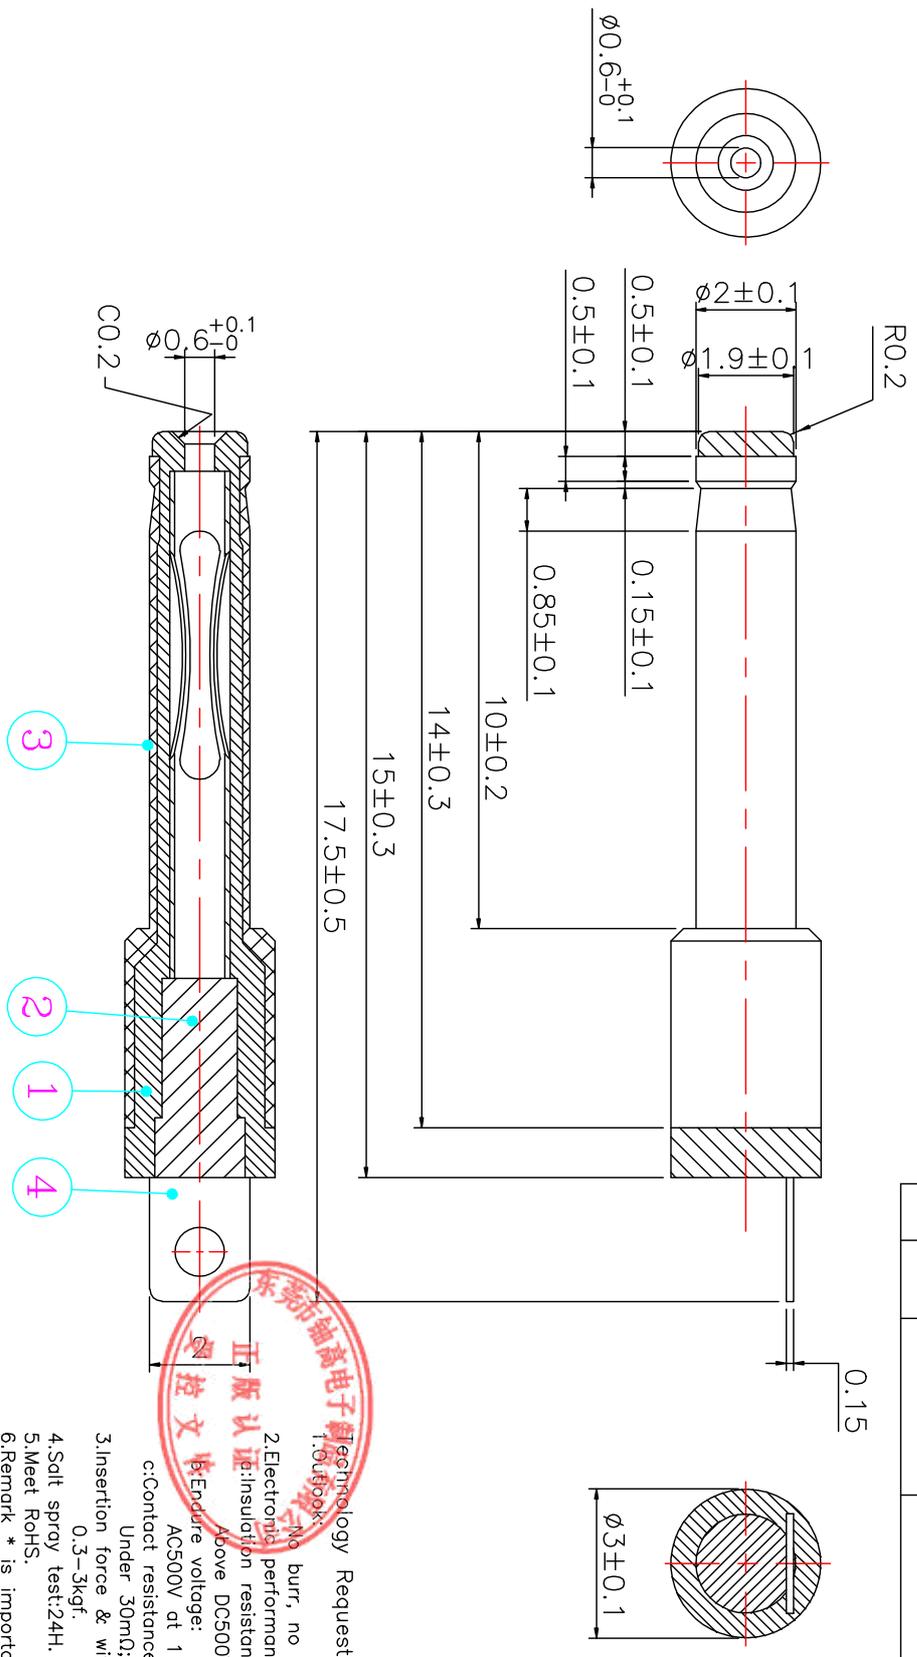

- Request:
1. Outlook: No burr, no hurt.
 2. Electronic performance: Above DC500V/100MQ;
 3. Insertion force & withdrawal force: Under 30mNf; 0.3-3kgf.
 4. Salt spray test: 24H.
 5. Meet RoHS.
 6. Remark * is important specification.

单位 Unit	一般公差 The General tolerance	7	8	9
mm				
比例 Scale	XX:±0.3			
视图 Third angle projection	X:X:±0.1			
	.XX:±0.05			
		NO.		
		1		
		2		
		3		
		4		
		5		
		6		
		7		
		8		
		9		

批准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	东莞市铷高电子有限公司	
June	杨义邦	李莹峰	规格 DESCRIPTION:	DC PLUG $\phi 2.0 \times \phi 0.6 \times 17.5$
			品名 P/N:	2006TV175C
			图号 DRAWN NO:	CP-01-0013