
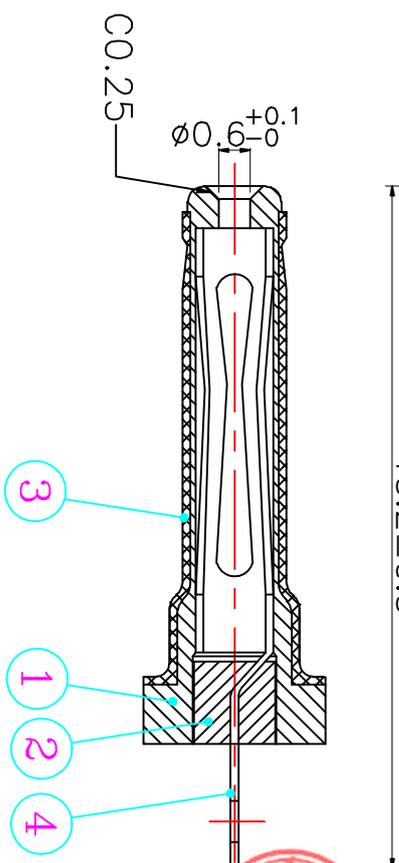

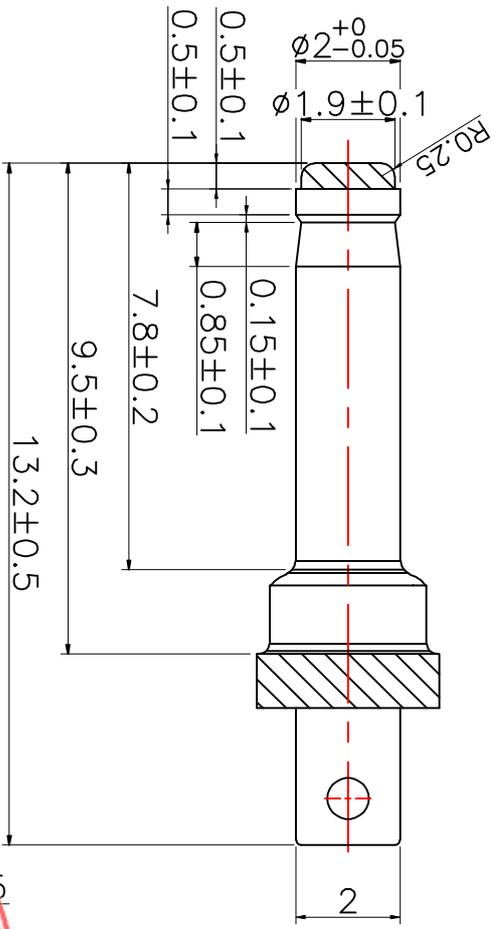


ROHS

版本 REV	修正标记 REV/LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917



Request:  
1.Outlook: No burr, no hurt.  
2.Electronic performance:  
a:Insulation resistance:  
Above DC500V/100MΩ;  
AC500V at 1 minute;  
b:Endure voltage:  
AC500V at 1 minute;  
c>Contact resistance:  
Under 30mΩ;  
3.Insertion force & withdrawal force:  
0.3~3kgf.  
4.Salt spray test:24H.  
5.Meet RoHS.  
6.Remark \* is important specification.

东莞市铷高电子有限公司

核准 APPROVED BY  
校对 CHECKED BY  
制图 DRAWN BY

June 杨义邦 李莹峰

规格 DESCRIPTION: DC PLUG  $\varnothing 2.0 * \varnothing 0.6 * 13.2$   
品名 P/N: 2006TV132  
图号 DRAWN NO: CP-01-0004

单位 Unit	mm	一般公差 The general tolerance
比例 Scale	5:1	xx.:±0.3
视图 Third angle projection		x.x:±0.1
		.xx:±0.05

7	内零件	BRONZE(C5191)	Sn 40~120μ
6	镀层	BRASS(C2680)	Ni 40~120μ
5		POM	BLACK
4		PA66	BLACK
3			PLATING
2			
1			
NO.			

1	2	3	4	5	6	7	8	9
G	F	E	D	C	B	A	G	F