
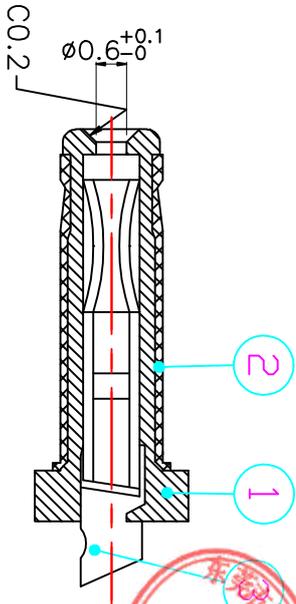


ROHS

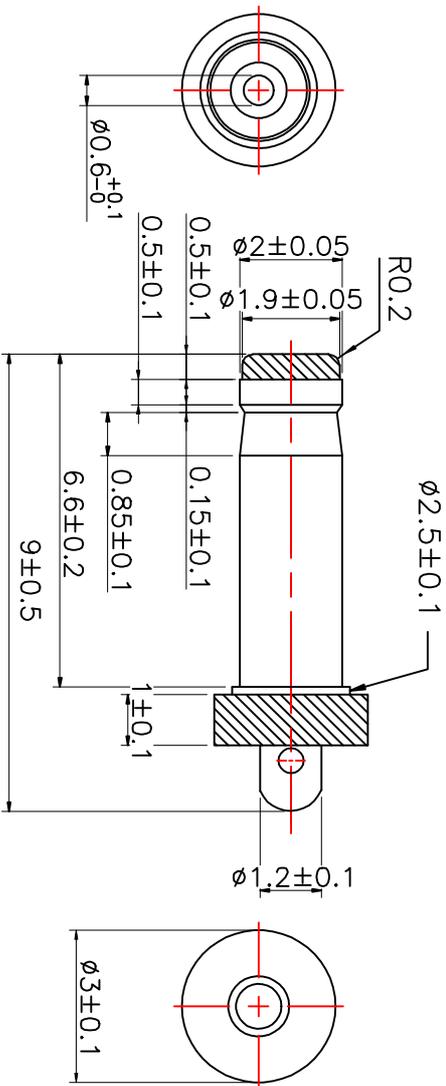

Technology Request:  
 1.Outlook:No burr, no hurt.  
 2.Electronic performance:  
 a:Insulation resistance: Above DC500V/100MΩ;  
 b:Endure voltage:AC500V at 1 minute;  
 c>Contact resistance:Under 30mΩ;  
 3.Insertion force & withdrawal force:0.3-3kgf.  
 4.Salt spray test:24H.  
 5.Meet RoHS.  
 6.Remark \* is important specification.

REV	修正描述 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签名 SIGN	日期 DATE
V1.0		新版制定		June	20180917

单位 Unit	一般公差 The general tolerance	7	核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY	东莞市铷高电子有限公司		
mm			June	杨义邦	李莹峰	规格 DESCRIPTION:	DC PLUG $\phi 2.0 \times \phi 0.6 \times 9.0$	
比例 Scale	XX:±0.3	5				品名 P/N:	2006TV090	
视图 Third angle projection	X:X:±0.1	3				图号 DRAWN NO:	CP-01-0001	
	.XX:±0.05	1						
		NO.						



东莞市铷高电子有限公司